

TVHAM.com

13cm Advanced receiver technical notes

This document contains important technical information to help you use your receiver. Latest technical information can be found at <http://www.TVHAM.com>.

Power supply requirements

The receiver requires a supply of 12 to 15V DC, **tip (center) positive**. Reverse polarity will cause very serious damage. Do NOT use less than 11V or the receiver may be damaged.

Video and audio connections

Video and audio connections are as follows:

- Yellow socket - composite video
- White socket - audio demodulated from 6.0MHz subcarrier (if transmitted)
- Red socket - audio demodulated from 6.5MHz subcarrier (if transmitted)

Video gain

The pre-set resistor on the receiver is the video gain control, and you'll need to set it for proper amplitude video output.

Powering a preamplifier

The receiver includes the facility to supply power up the co-ax to feed a mast-head preamplifier. As supplied, this feed is not connected. The supply voltage must not exceed 18V, and the current must not exceed 250mA - exceeding these limits will cause substantial damage to the receiver which is not covered by your guarantee. We strongly recommend fitting a 150mA fuse between the pin and the supply.

The DC Insert pin is the one on the metal RF module nearest the aerial socket.


Frequency coverage

The 13cm Advanced receiver covers 2304-2559MHz in 1MHz steps using the DIP switches on the board. A full listing of all operating frequencies is given in the table overleaf. Note that 0=off, 1=on (toward the sockets), and SW1 is the switch nearest the LED.

A half-step (500kHz) can also be added to any frequency by connecting the two pads near the crystal, identified in this picture. This will increase the receiver frequency by 500kHz, and may be useful for fine-tuning.

We suggest mounting a "+500kHz" switch away from the PCB if you want to make use of this feature.

WATNING: This transmitter is capable of operating outside the amateur band. Make sure you operate legally

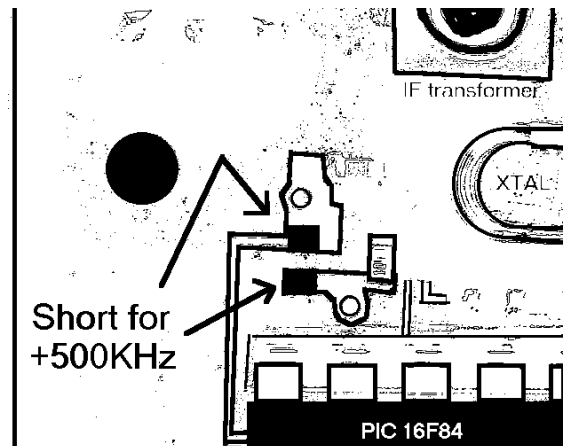

Frequency (MHz)	SW 1	SW 2	SW 3	SW 4	SW 5	SW 6	SW 7	SW 8	Frequency (MHz)	SW 1	SW 2	SW 3	SW 4	SW 5	SW 6	SW 7	SW 8
2304	0	0	0	0	0	0	0	0	2348	0	0	1	1	0	1	0	0
2305	1	0	0	0	0	0	0	0	2349	1	0	1	1	0	1	0	0
2306	0	1	0	0	0	0	0	0	2350	0	1	1	1	0	1	0	0
2307	1	1	0	0	0	0	0	0	2351	1	1	1	1	0	1	0	0
2308	0	0	1	0	0	0	0	0	2352	0	0	0	0	1	1	0	0
2309	1	0	1	0	0	0	0	0	2353	1	0	0	0	1	1	0	0
2310	0	1	1	0	0	0	0	0	2354	0	1	0	0	1	1	0	0
2311	1	1	1	0	0	0	0	0	2355	1	1	0	0	1	1	0	0
2312	0	0	0	1	0	0	0	0	2356	0	0	1	0	1	1	0	0
2313	1	0	0	1	0	0	0	0	2357	1	0	1	0	1	1	0	0
2314	0	1	0	1	0	0	0	0	2358	0	1	1	0	1	1	0	0
2315	1	1	0	1	0	0	0	0	2359	1	1	1	0	1	1	0	0
2316	0	0	1	1	0	0	0	0	2360	0	0	0	1	1	1	0	0
2317	1	0	1	1	0	0	0	0	2361	1	0	0	1	1	1	0	0
2318	0	1	1	1	0	0	0	0	2362	0	1	0	1	1	1	0	0
2319	1	1	1	1	0	0	0	0	2363	1	1	0	1	1	1	0	0
2320	0	0	0	0	1	0	0	0	2364	0	0	1	1	1	1	0	0
2321	1	0	0	0	1	0	0	0	2365	1	0	1	1	1	1	0	0
2322	0	1	0	0	1	0	0	0	2366	0	1	1	1	1	1	0	0
2323	1	1	0	0	1	0	0	0	2367	1	1	1	1	1	1	0	0
2324	0	0	1	0	1	0	0	0	2368	0	0	0	0	0	0	1	0
2325	1	0	1	0	1	0	0	0	2369	1	0	0	0	0	0	1	0
2326	0	1	1	0	1	0	0	0	2370	0	1	0	0	0	0	1	0
2327	1	1	1	0	1	0	0	0	2371	1	1	0	0	0	0	1	0
2328	0	0	0	1	1	0	0	0	2372	0	0	1	0	0	0	1	0
2329	1	0	0	1	1	0	0	0	2373	1	0	1	0	0	0	1	0
2330	0	1	0	1	1	0	0	0	2374	0	1	1	0	0	0	1	0
2331	1	1	0	1	1	0	0	0	2375	1	1	1	0	0	0	1	0
2332	0	0	1	1	1	0	0	0	2376	0	0	0	1	0	0	1	0
2333	1	0	1	1	1	0	0	0	2377	1	0	0	1	0	0	1	0
2334	0	1	1	1	1	0	0	0	2378	0	1	0	1	0	0	1	0
2335	1	1	1	1	1	0	0	0	2379	1	1	0	1	0	0	1	0
2336	0	0	0	0	0	1	0	0	2380	0	0	1	1	0	0	1	0
2337	1	0	0	0	0	1	0	0	2381	1	0	1	1	0	0	1	0
2338	0	1	0	0	0	1	0	0	2382	0	1	1	1	0	0	1	0
2339	1	1	0	0	0	1	0	0	2383	1	1	1	1	0	0	1	0
2340	0	0	1	0	0	1	0	0	2384	0	0	0	0	1	0	1	0
2341	1	0	1	0	0	1	0	0	2385	1	0	0	0	1	0	1	0
2342	0	1	1	0	0	1	0	0	2386	0	1	0	0	1	0	1	0
2343	1	1	1	0	0	1	0	0	2387	1	1	0	0	1	0	1	0
2344	0	0	0	1	0	1	0	0	2388	0	0	1	0	1	0	1	0
2345	1	0	0	1	0	1	0	0	2389	1	0	1	0	1	0	1	0
2346	0	1	0	1	0	1	0	0	2390	0	1	1	0	1	0	1	0
2347	1	1	0	1	0	1	0	0	2391	1	1	1	0	1	0	1	0

Frequency (MHz)	SW 1	SW 2	SW 3	SW 4	SW 5	SW 6	SW 7	SW 8	Frequency (MHz)	SW 1	SW 2	SW 3	SW 4	SW 5	SW 6	SW 7	SW 8
2392	0	0	0	1	1	0	1	0	2436	0	0	1	0	0	0	0	1
2393	1	0	0	1	1	0	1	0	2437	1	0	1	0	0	0	0	1
2394	0	1	0	1	1	0	1	0	2438	0	1	1	0	0	0	0	1
2395	1	1	0	1	1	0	1	0	2439	1	1	1	0	0	0	0	1
2396	0	0	1	1	1	0	1	0	2440	0	0	0	1	0	0	0	1
2397	1	0	1	1	1	0	1	0	2441	1	0	0	1	0	0	0	1
2398	0	1	1	1	1	0	1	0	2442	0	1	0	1	0	0	0	1
2399	1	1	1	1	1	0	1	0	2443	1	1	0	1	0	0	0	1
2400	0	0	0	0	0	1	1	0	2444	0	0	1	1	0	0	0	1
2401	1	0	0	0	0	1	1	0	2445	1	0	1	1	0	0	0	1
2402	0	1	0	0	0	1	1	0	2446	0	1	1	1	0	0	0	1
2403	1	1	0	0	0	1	1	0	2447	1	1	1	1	0	0	0	1
2404	0	0	1	0	0	1	1	0	2448	0	0	0	0	1	0	0	1
2405	1	0	1	0	0	1	1	0	2449	1	0	0	0	1	0	0	1
2406	0	1	1	0	0	1	1	0	2450	0	1	0	0	1	0	0	1
2407	1	1	1	0	0	1	1	0	2451	1	1	0	0	1	0	0	1
2408	0	0	0	1	0	1	1	0	2452	0	0	1	0	1	0	0	1
2409	1	0	0	1	0	1	1	0	2453	1	0	1	0	1	0	0	1
2410	0	1	0	1	0	1	1	0	2454	0	1	1	0	1	0	0	1
2411	1	1	0	1	0	1	1	0	2455	1	1	1	0	1	0	0	1
2412	0	0	1	1	0	1	1	0	2456	0	0	0	1	1	0	0	1
2413	1	0	1	1	0	1	1	0	2457	1	0	0	1	1	0	0	1
2414	0	1	1	1	0	1	1	0	2458	0	1	0	1	1	0	0	1
2415	1	1	1	1	0	1	1	0	2459	1	1	0	1	1	0	0	1
2416	0	0	0	0	1	1	1	0	2460	0	0	1	1	1	0	0	1
2417	1	0	0	0	1	1	1	0	2461	1	0	1	1	1	0	0	1
2418	0	1	0	0	1	1	1	0	2462	0	1	1	1	1	0	0	1
2419	1	1	0	0	1	1	1	0	2463	1	1	1	1	1	0	0	1
2420	0	0	1	0	1	1	1	0	2464	0	0	0	0	0	1	0	1
2421	1	0	1	0	1	1	1	0	2465	1	0	0	0	0	1	0	1
2422	0	1	1	0	1	1	1	0	2466	0	1	0	0	0	1	0	1
2423	1	1	1	0	1	1	1	0	2467	1	1	0	0	0	1	0	1
2424	0	0	0	1	1	1	1	0	2468	0	0	1	0	0	1	0	1
2425	1	0	0	1	1	1	1	0	2469	1	0	1	0	0	1	0	1
2426	0	1	0	1	1	1	1	0	2470	0	1	1	0	0	1	0	1
2427	1	1	0	1	1	1	1	0	2471	1	1	1	0	0	1	0	1
2428	0	0	1	1	1	1	1	0	2472	0	0	0	1	0	1	0	1
2429	1	0	1	1	1	1	1	0	2473	1	0	0	1	0	1	0	1
2430	0	1	1	1	1	1	1	0	2474	0	1	0	1	0	1	0	1
2431	1	1	1	1	1	1	1	0	2475	1	1	0	1	0	1	0	1
2432	0	0	0	0	0	0	0	1	2476	0	0	1	1	0	1	0	1
2433	1	0	0	0	0	0	0	1	2477	1	0	1	1	0	1	0	1
2434	0	1	0	0	0	0	0	1	2478	0	1	1	1	0	1	0	1
2435	1	1	0	0	0	0	0	1	2479	1	1	1	1	0	1	0	1

Frequency (MHz)	SW 1	SW 2	SW 3	SW 4	SW 5	SW 6	SW 7	SW 8	Frequency (MHz)	SW 1	SW 2	SW 3	SW 4	SW 5	SW 6	SW 7	SW 8
2480	0	0	0	0	1	1	0	1	2520	0	0	0	1	1	0	1	1
2481	1	0	0	0	1	1	0	1	2521	1	0	0	1	1	0	1	1
2482	0	1	0	0	1	1	0	1	2522	0	1	0	1	1	0	1	1
2483	1	1	0	0	1	1	0	1	2523	1	1	0	1	1	0	1	1
2484	0	0	1	0	1	1	0	1	2524	0	0	1	1	1	0	1	1
2485	1	0	1	0	1	1	0	1	2525	1	0	1	1	1	0	1	1
2486	0	1	1	0	1	1	0	1	2526	0	1	1	1	1	0	1	1
2487	1	1	1	0	1	1	0	1	2527	1	1	1	1	1	0	1	1
2488	0	0	0	1	1	1	0	1	2528	0	0	0	0	0	1	1	1
2489	1	0	0	1	1	1	0	1	2529	1	0	0	0	0	1	1	1
2490	0	1	0	1	1	1	0	1	2530	0	1	0	0	0	1	1	1
2491	1	1	0	1	1	1	0	1	2531	1	1	0	0	0	1	1	1
2492	0	0	1	1	1	1	0	1	2532	0	0	1	0	0	1	1	1
2493	1	0	1	1	1	1	0	1	2533	1	0	1	0	0	1	1	1
2494	0	1	1	1	1	1	0	1	2534	0	1	1	0	0	1	1	1
2495	1	1	1	1	1	1	0	1	2535	1	1	1	0	0	1	1	1
2496	0	0	0	0	0	0	1	1	2536	0	0	0	1	0	1	1	1
2497	1	0	0	0	0	0	1	1	2537	1	0	0	1	0	1	1	1
2498	0	1	0	0	0	0	1	1	2538	0	1	0	1	0	1	1	1
2499	1	1	0	0	0	0	1	1	2539	1	1	0	1	0	1	1	1
2500	0	0	1	0	0	0	1	1	2540	0	0	1	1	0	1	1	1
2501	1	0	1	0	0	0	1	1	2541	1	0	1	1	0	1	1	1
2502	0	1	1	0	0	0	1	1	2542	0	1	1	1	0	1	1	1
2503	1	1	1	0	0	0	1	1	2543	1	1	1	1	0	1	1	1
2504	0	0	0	1	0	0	1	1	2544	0	0	0	0	1	1	1	1
2505	1	0	0	1	0	0	1	1	2545	1	0	0	0	1	1	1	1
2506	0	1	0	1	0	0	1	1	2546	0	1	0	0	1	1	1	1
2507	1	1	0	1	0	0	1	1	2547	1	1	0	0	1	1	1	1
2508	0	0	1	1	0	0	1	1	2548	0	0	1	0	1	1	1	1
2509	1	0	1	1	0	0	1	1	2549	1	0	1	0	1	1	1	1
2510	0	1	1	1	0	0	1	1	2550	0	1	1	0	1	1	1	1
2511	1	1	1	1	0	0	1	1	2551	1	1	1	0	1	1	1	1
2512	0	0	0	0	1	0	1	1	2552	0	0	0	1	1	1	1	1
2513	1	0	0	0	1	0	1	1	2553	1	0	0	1	1	1	1	1
2514	0	1	0	0	1	0	1	1	2554	0	1	0	1	1	1	1	1
2515	1	1	0	0	1	0	1	1	2555	1	1	0	1	1	1	1	1
2516	0	0	1	0	1	0	1	1	2556	0	0	1	1	1	1	1	1
2517	1	0	1	0	1	0	1	1	2557	1	0	1	1	1	1	1	1
2518	0	1	1	0	1	0	1	1	2558	0	1	1	1	1	1	1	1
2519	1	1	1	0	1	0	1	1	2559	1	1	1	1	1	1	1	1